



PH2S Installation

1. Clean area on windshield where camera will be mounted, usually underneath the rearview mirror. Once you have selected the position for the camera remove the red cover on top of camera to expose 3M commercial double sided tape. Stick 3M mount and camera to windshield. Example figure 1.

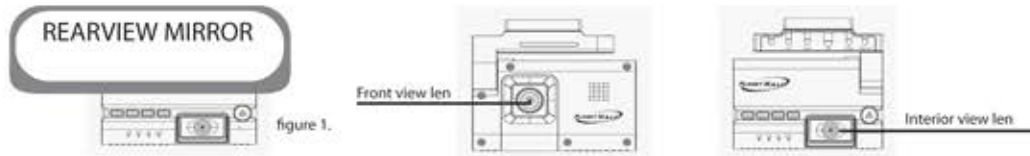


2. Plug power cable to camera and run the rest of the cable to the bottom of the car's dashboard. The end of the the power cable has 2 color cables. Red cable goes to ignition or constant 12V and black goes to ground. There are 2 ways of wiring this to your vehicle depending if you want the camera to be on all the time or just on when the vehicle is on.

If you want the camera to be on all the time then connect red to constant 12v and black to ground. Example Figure 2. If you want the camera to be on and off with ignition, wire red to car's ignition and black to ground. Example Figure 3.

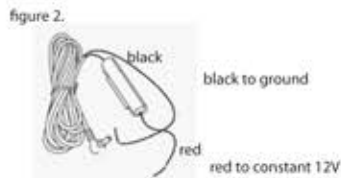


camera on all the time

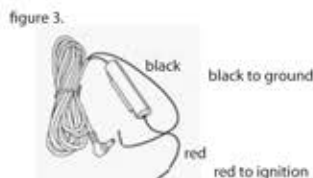

camera on with ignition on

PH4S Installation

1. Installation for PH4S is exactly the same as PH2S above the difference is that you have options to install 2 additional external cameras. Plug the external camera cables into the left and right port of the camera and run external cameras to desired locations. Make sure surface is clean before mounting cameras. Example figure 4.

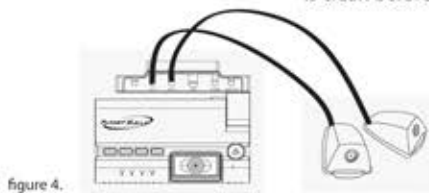

Optional accessories



External HDD/SSD
(connect to micro usb port)

WIFI dongle/adaptor
(connect to micro usb port or to external HDD if micro usb port is use)

Video output cable
(connect to video out port)

Extra SD memory card (8GB/16GB/32GB/64GB)
(insert in SD slot)

Cigar plug powerin cable
(plug in power port)

