



VIDEO COMPRESSOR & ADDITIONAL CAMERA INSTALLATION DIAGRAM




1. Wire in the Power DC Cable to Video Compressor
2. Connect MUX 2.5mm Cable from Compressor to PHLS Drive Recorder.
3. Connect up to 4 External Cameras to Compressor Port 1-2-3-4.
4. Slide & Screw to lock Tamperproof Mount Bracket in place.
5. Plug in extension only if needed, then ext/int camera.
6. Leave unwired unless reverse signal required.
7. Plug in DC power & turn ignition ACC Power ON.



Do NOT change the installation steps it may cause failure from electronic shock.

EXTERNAL / INTERNAL CAMERAS
UP TO 4 CAMERAS TO COMPRESSOR

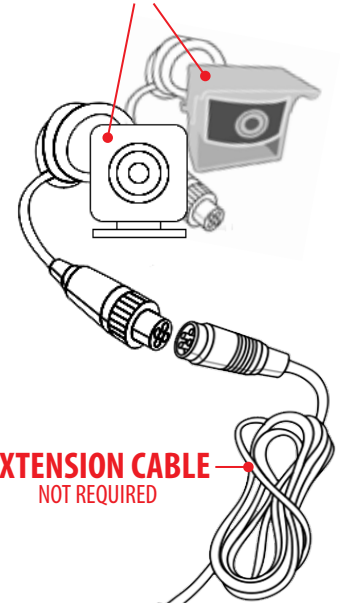

5 EXTENSION CABLE
NOT REQUIRED



REVERSE GEAR SIGNAL
(Trigger input wire)

(RED) +
(BLACK) -

7



PHLS 2.0 DRIVER RECORDER



CAMERA IN

2

MUX CABLE

CAMERA PORT 1-2-3-4

MUX PORT

DC PORT

VIDEO COMPRESSOR

3

VIDEO IN PORT TO 4PIN CABLE

1

POWER CABLE
8v-32v DC POWER

GND(Black)

BATT+(Red)

ACC(White)

4

VIDEO COMPRESSOR
TAMPERPROOF MOUNT BRACKET